

PowerWave 33

Efficient power protection for today's IT and process-related work environments



PowerWave 33, an online double conversion UPS, delivers continuous power availability to network-critical infrastructures of both data centers and process control environments. Offering maximum power protection, the PowerWave 33 has a small footprint and uses less energy than comparable products – thus delivering significant savings.

The PowerWave 33 is available over a model range of 60 kW to 500 kW and can be configured to operate as a single, standalone UPS or as a multi-cabinet UPS system with up to ten UPS cabinets connected in parallel, achieving a total power capacity of up to 5 MW.

High reliability

- Online double conversion technology
- Parallelable systems for increased redundancy
- Extendable backup time
- Ripple-free and temperature controlled battery chargers extend battery life time performance

Low cost of ownership

- Up to 96% efficiency in double conversion across a wide load range
- Up to $\geq 99\%$ efficiency in eco-mode
- Rated output power factor 1.0
- Near-unity input power factor at partial and full loads

Compact size

- Small footprint offers saving on expensive floor space
- Cooling air exhaust through the top of the cabinet – no rear cabinet clearance is required (only 60–120 kW and 400 to 500 kW units)

Efficient service concept

- Front access for serviceability and maintenance
- User-friendly LCD
- Remote monitoring and connectivity options

Power and productivity
for a better world™




PowerWave 33

Product features



The PowerWave 33 is available in various configurations.

Easily scalable for capacity and redundancy

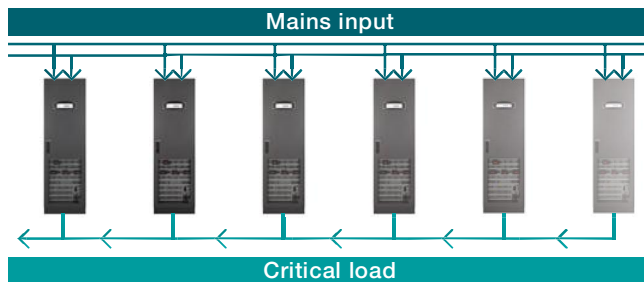

As your power requirements grow, the UPS system grows with them – thanks to its scalability – even in the most confined spaces.

Space-saving and simple to service

Space-saving mechanical design results in a power density of up to 363kW/m² and front-to-top airflow allows installation directly against a wall (60–120 kW and 400–500 kW units). For service, only frontal access is needed, which means that the total footprint with maintenance clearances is minimized.

Optionally a top cable entry enclosure may be used for the 400–500 kW UPS. This enclosure permits the connection of all incoming power cables from the top and extends the overall width of the UPS by 500 mm.

Up to 10 units can be configured in parallel to provide up to five megawatts of UPS power or redundant backup. This scalability means the UPS system capacity can be sized to match the load requirements, with the possibility to add incremental capacity later, when power needs change. The resulting savings in power usage over the service life of the UPS are substantial.

Well optimized for modern loads

A 1.0 rated output power factor means that each and every Watt of power is real power that is available for use. This helps with optimizing the complete electrical infrastructure in terms of switchgear and cabling, both upstream and downstream from the UPS.


Battery runtime can be optimized to match the exact needs. The UPS supports usage of 42–48 batteries (60–120 kW units) or 44–50 batteries (160–500 kW units) in a single string, which minimizes the total cost of installation as an optimal configuration can be used and so there is no need to oversize the battery.

Mains-friendly with low input harmonics and advanced PFC

This UPS's front-end rectifier actively controls the input power factor and has extremely low input current harmonic content. This means that no additional filters are required upstream and the UPS does not cause any disturbance to other equipment connected to the same input source. Unity input power factor and low harmonic distortion allows upstream cabling, switchgear and generator sizes to be optimized, and reduces heating of input transformers.

PowerWave 33

Available models

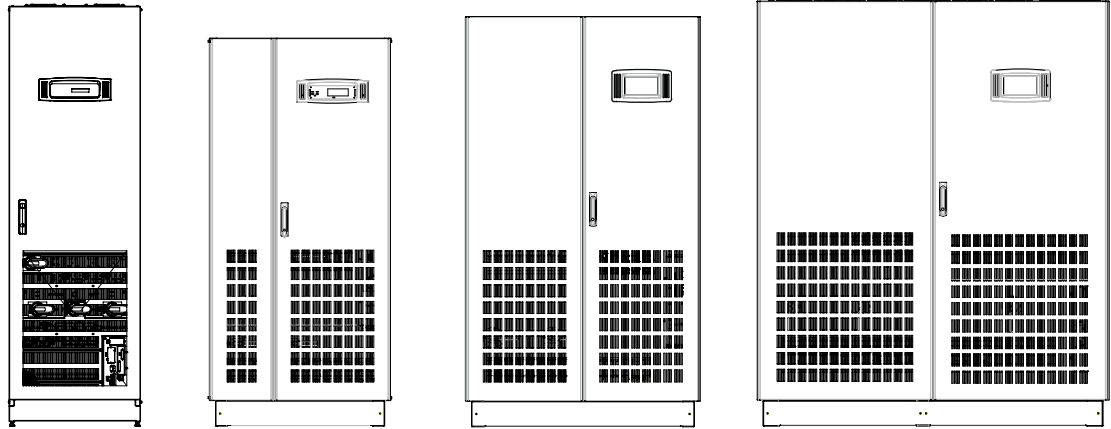

Cabinet type	60–120 kW	160–200 kW	250–300 kW	400–500 kW
Dimension w × h × d	615 × 1975 × 480 mm	850 × 1820 × 750 mm	1100 × 1920 × 750 mm	1650 × 2094 × 850 mm
Footprint	0.3 m ²	0.64 m ²	0.82 m ²	1.4 m ²

UPS cabinet configuration

- Online double conversion UPS
- HMI interface with mimic diagram and LCD (60–200 kW)
- Graphical touch screen display (250–500 kW units)
- Input, bypass and battery protection fuses
- Manual bypass switch (optional for the units 400–500 kW)
- Single- and dual-input feed available
- Communication interfaces: RS-232 port and 5 input dry contacts (incl. EPO and GEN On)

Options

- Integrated back-feed protection
- Parallel system kit
- Synchronization kit
- Battery temperature sensor
- Remote panel (graphical touch screen display)
- Halogen-free cabling
- IP 21
- Control and monitoring (relay card, ModBus RS-485, ModBus TCP/IP, SNMP)
- External battery cabinets
- Top cable entry enclosure (400–500 kW units)

PowerWave 33 60–120 kW

Technical specification

General data	60 kW	80 kW	100 kW	120 kW
Output power max.	60 kW	80 kW	100 kW	120 kW
Output power factor	1.0			
Topology	Online double conversion			
Parallel configuration	Up to 10 units			
UPS type	Standalone			
Input				
Nominal input voltage	3× 380 / 220 VAC +N, 3× 400 / 230 VAC +N, 3× 415 / 240 VAC +N			
Voltage tolerance	For loads <100% (–10%, +15%), <80% (–20%, +15%), <60% (–30%, +15%) (referred to 3× 400 / 230 V)			
Input distortion THDi	≤4%			
Frequency	35–70 Hz			
Power factor	0.99			
Output				
Rated output voltage	3× 380 / 220 VAC + N, 3× 400 / 230 VAC + N, 3× 415 / 240 VAC + N			
Voltage distortion	<2%			
Frequency	50 Hz or 60 Hz			
Overload capability	0.5 min.: 150% load / 5 min.: 125% load / 20 min.: 110% load			
Unbalanced load	100% (all three phases regulated independently)			
Efficiency				
Double conversion	Up to 96%			
In eco-mode configuration	≥99%			
Environment				
Storage temperature	–25 °C to +70 °C			
Operating temperature	0 °C to +40 °C			
Altitude configuration	1000 m without derating			
Battery				
Battery type	Sealed, lead-acid, maintenance-free or NiCd			
Communications				
User interface	Optional			
Customer inputs	Remote shutdown, genset interface			
Customer outputs	Potential-free contacts (optional), USB (optional)			
Standards				
Safety	IEC / EN 62040-1			
Electromagnetic compatibility (EMC)	IEC / EN 62040-2			
Performance	IEC / EN 62040-3			
Product certification	CE			
Protection rating	IP 20			
Manufacturing	ISO 9001:2008, ISO 14001:2004, OHSAS18001			
Weight, dimensions				
Weight (without batteries)	198 kg	206 kg	228 kg	230 kg
Dimensions w × h × d	615 × 1954 × 480 mm or 615 × 1978 × 480 mm (with feet)			

PowerWave 33 160–500 kW

Technical specification

General data	160 kW	200 kW	250kW	300 kW	400 kW	500 kW
Output power max.	160 kW	200 kW	250 kW	300 kW	400 kW	500 kW
Output power factor	1.0					
Topology	Online double conversion					
Parallel configuration	Up to 10 units					
UPS type	Standalone					
Inbuilt batteries	Optional					
Input						
Nominal input voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N					
Voltage tolerance	For loads <100% (-23%, +15%), <80% (-30%, +15%), <60% (-40%, +15%) (referred to 3× 400 / 230 V)					
Input distortion THDi	≤3.5%					
Frequency	35–70 Hz					
Power factor	0.99					
Output						
Rated output voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N					
Voltage distortion	<2%					
Frequency	50 Hz or 60 Hz					
Overload capability	1 min.: 135% load / 10 min.: 110% load					
Unbalanced load	100% (all three phases regulated independently)					
Crest factor	3 : 1 (load supported)					
Efficiency						
Overall efficiency	Up to 96%					
In eco-mode configuration	98%					
Environment						
Storage temperature	–25 °C to +70 °C					
Operating temperature	0 °C to +40 °C					
Altitude configuration	1000 m without derating					
Battery						
Battery type	Sealed, lead-acid, maintenance-free or NiCd					
Communications						
Graphical display	Optional		Yes			
Standards						
Safety	IEC / EN 62040-1					
Electromagnetic compatibility (EMC)	IEC / EN 62040-2					
Performance	IEC / EN 62040-3					
Product certification	CE					
Protection rating	IP 20					
Manufacturing	ISO 9001:2008, ISO 14001:2004, OHSAS18001					
Weight, dimensions						
Weight (without batteries)	290 kg	310 kg	390 kg	410 kg	950 kg	1000 kg
Dimensions w × h × d	850 × 1820 × 750 mm		1100 × 1920 × 750 mm		1650 × 1994 × 850 mm	

Contact us

www.abb.com/ups

© Copyright 2016 ABB. All rights reserved.
Specifications subject to change without notice.



4NWP102350R0001